



CA200P4/24V

1000W · 4-channel 24V amplifier

Max power output at 24V:

4x 300W/4Ω or 2x 1000W/4Ω (bridged)

RMS output at 24V:

4x100W/4Ω or 2x 320W/4Ω (bridged)

Brushed aluminium heatsink

RCA line input

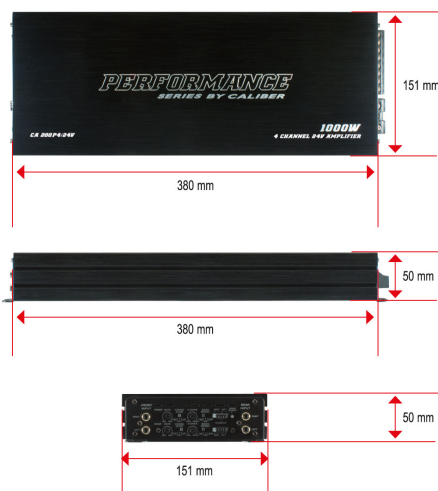
High level input

Bass Boost (0-6-12dB • 45Hz)

Variable input sensitivity

Overload and thermal protection

Dimensions: 380(W) x 151(D) x 50(H) mm

Dimensions:

8 714505 042480

WWW.CALIBER.NL

Parallelweg 2a • 4261 GA Wijk en Aalburg • The Netherlands • Tel: +31 416-699 000 • Fax: +31 416-699 001